


Edge10 have redesigned their CCTV range and come up with two solutions which are ideal for the security monitor market. The C171 offers the user a high quality display for their CCTV system. The monitor includes a hard glass front and a 3D comb filter to enhance and sharpen the viewing of moving images. There are multiple video inputs on the monitor and it is also VESA wall mountable. As with all Edge10 monitors the C171 comes backed with our 3 year on site warranty

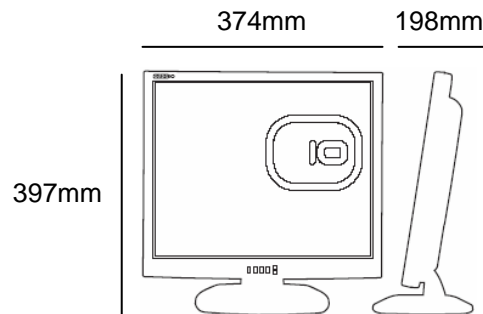

KEY FEATURES

MULTIPLE VIDEO INPUTS/OUTPUTS OPTIC10 TOUGHENED GLASS ADVANCED VIDEO PROCESSING SCALER WITH 3D FILTER PIP & POP

Monitor Cosmetics:	Black bezel with black stand and black rear cabinet
LCD:	17.0" active matrix, thin film transistor (TFT) LVDS, View Size (WxH) 270mm x 338mm
Pixel Pitch (mm):	0.264(H) x 0.264(W)
Native Resolution:	SXGA 1280x 1024 (1.3 Megapixels)
Scan Frequency:	Horizontal: 31.5kHz - 80kHz Vertical: 50Hz - 75Hz
View Angle:	Horizontal: 140° Vertical: 130°
Display Area (mm):	270(H) x 338(V)
Display Colour:	16.2 Million
Contrast Ratio:	450:1
Brightness:	300 cd/m2
Response Time (Tr+Tf):	5ms
Speakers:	2 X 2W
Anti-theft Security:	Kensington® Lock
Compatibility:	Windows 95/98/98SE/Me/NT4/2000/XP/Vista, Mac OS, Macintosh, Linux Plug & Play - DDC1/2B
Input Video Signal:	Analogue: (Connector: 15 pin D-sub) 0.7 Vp-p separate sync. TTL level, RGB analogue, Detachable cable. S-Video Composite Video BNC
Input Audio Signal:	Analogue: Audio L&R RCA
Output Video Signal:	Analogue: Video composite BNC & S-Video
Output Audio Signal:	Analogue: Audio L&R RCA
Input power source:	AC 100-240V, 50-60Hz
Power Management: (EPA Compliant)	Normal operation: < 50 W Off/Suspend/Stand-by mode: < 1W Operation
Environment:	Temperature: 0 - 40°C Humidity: 20% - 80%
Tilt Angle:	Max. forward tilt: 3° Max. backward tilt: 20°
Weight:	Net: 4.9kg. Gross: 5.8kg
Dimensions (W x D x H):	374 x 198 x 397mm
VESA Wall Mount Compliant:	100mm x 100mm
Warranty:	Three year on-site exchange

Edge10 Corporation Limited. 39a London Road, Alderley Edge, Cheshire, SK9 7JT. UK.
tel: +44 (0) 1625 585 880 fax: +44 (0) 871 855 2153 web: www.edge10.com

Compliant with ISO-13406-2 regarding pixel faults. Specifications are subject to change without notice.

